


Hikari

Assembly Instructions

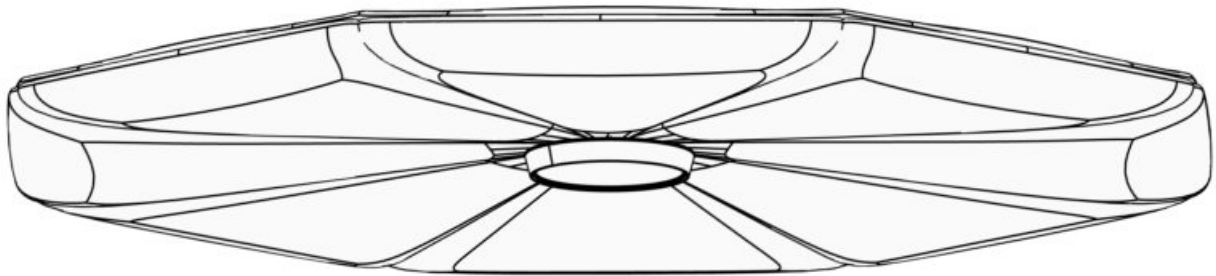

zilenziO

Assembly Instructions Hikari

Important Tips for Assembling Your Zilenzio Products

Handle Packaging with Care

When opening the packaging, use a knife carefully to avoid damaging the product.

Create a Safe Unpacking Space

Lay a blanket, use the inside of the box, or ensure the floor is clean and free from debris to protect your product during unpacking.

Keep It Clean


Always handle the products with clean hands to preserve their finish and appearance.

Mindful Placement

Place unassembled items gently. This small step helps protect the finish and ensures the products look flawless when assembled.

Avoid Sharp or Hard Surfaces

Never lean the products against sharp edges or hard surfaces. Doing so can cause indentations in the wooden frame or filling, which can be difficult to restore.

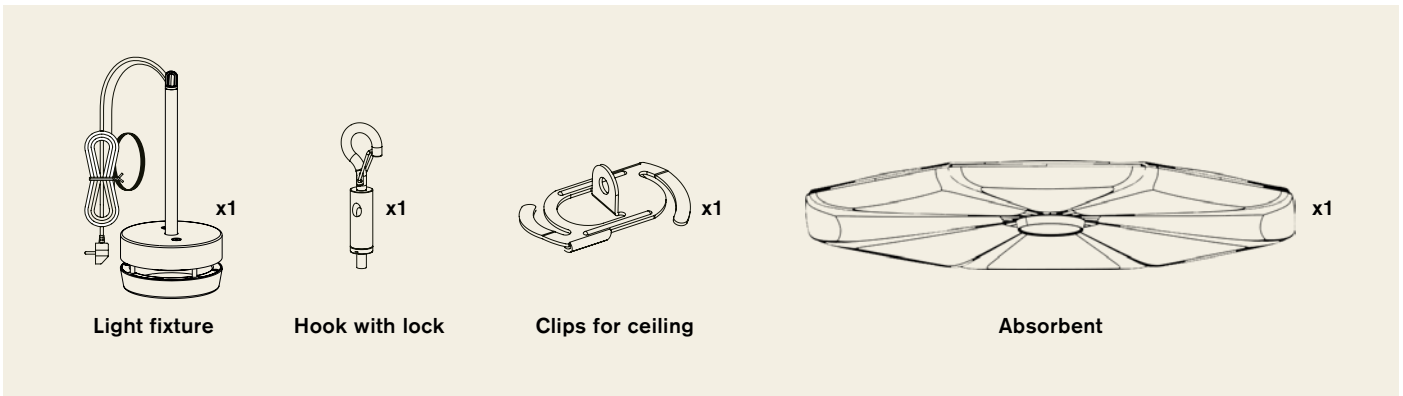

Important safety instructions

Read these instructions carefully before commencing installation and retain for future reference.

1. The luminaire should be installed by a licenced electrician and in accordance with local regulations. Make sure that the power is off before installation or maintenance.
2. Suitable for operation in ambient not exceeding 40°C.
3. Suitable for dry locations.

CAUTION

The mounting means provided with this luminaire has not been evaluated for reliability. If installed where failure of the mounting means could cause injury to persons or damage to property below supplemental means of securement should be considered.


Weights

ø23.6"	6.8 lbs
ø31.5"	13.9 lbs
ø43.3"	15.4 lbs


Assembly Instructions Hikari

Installation


1




2




3



4




5




6

Remove the paper card.




7

DIP SWITCH
on LED module




NOTE! Only change when fixture is OFF.


8

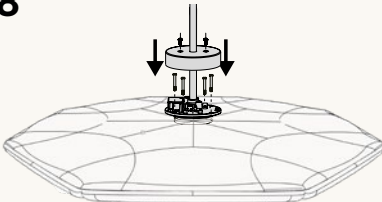


9




10




11







Insert the wire into the gripper. Always insert the wire through the pin unless otherwise stated.



Adjust the gripper down. When you let go of the gripper it will automatically lock itself on the wire.



Press the pin and adjust up. When you press the pin the lock opens and the gripper slides on the wire. Release pin to lock again.



A. Direction of wire and gripper must be in straight line.
B. The wire must be inserted all the way through the gripper and protrude at least 0.2 inch from the bottom.

zilenzio